

# Ag/Clear Water Pump

2.5H

## Overview:

The 4" suction x 2.5" discharge self-priming centrifugal 2.5H clearwater/agricultural pump provides up to a maximum of 700 gallons per minute pumping and up to 350 feet of head. This pump is usually mounted on a trailer and features the standard PowerPrime Pumps Clean Prime Venturi priming system which allows it to run continuously, unattended and even run dry.

## Features:



## Specs:

Maximum Flow	490 GPM
Maximum Head	360 feet
Pump Size	4" x 2.5"
Maximum Solids Handling	0.41 inches
Dry weight	
Footprint	

## Accessories:

- Spillguard
- Suction and Discharge Hoses
- Fuel Nurse Tank
- VFD for electric driven models



Liquid ingenuity.™

800-742-7246  
rainforrent.com

PUMPS • TANKS • FILTRATION • PIPE • SPILLGUARDS

Rain for Rent is a registered trademark of Western Oilfields Supply Company. Features and specifications are subject to change without notice.



# Rain For Rent

CURVE: 01-0133-02-45

PUMP : 2.5H

ALL INFORMATION CONTAINED IN OR DISCLOSED BY THIS DOCUMENT IS CONSIDERED CONFIDENTIAL AND PROPRIETARY BY RAIN FOR RENT. ALL DISCLOSURES OF DESIGN INFORMATION AND REPRODUCTION OF THIS DOCUMENT AND ALL SALES RIGHTS ARE EXCLUSIVELY RESERVED BY AND TO RAIN FOR RENT AND OTHERS IS PROHIBITED WITHOUT THE PRIOR WRITTEN CONSENT OF RAIN FOR RENT

SUCTION 4"


DISCHARGE 2.5"

MAX. SPHERE 0.41"

IMPELLER 7 VANE

IMPELLER 14"

IMPELLER & WEAR RINGS BRASS

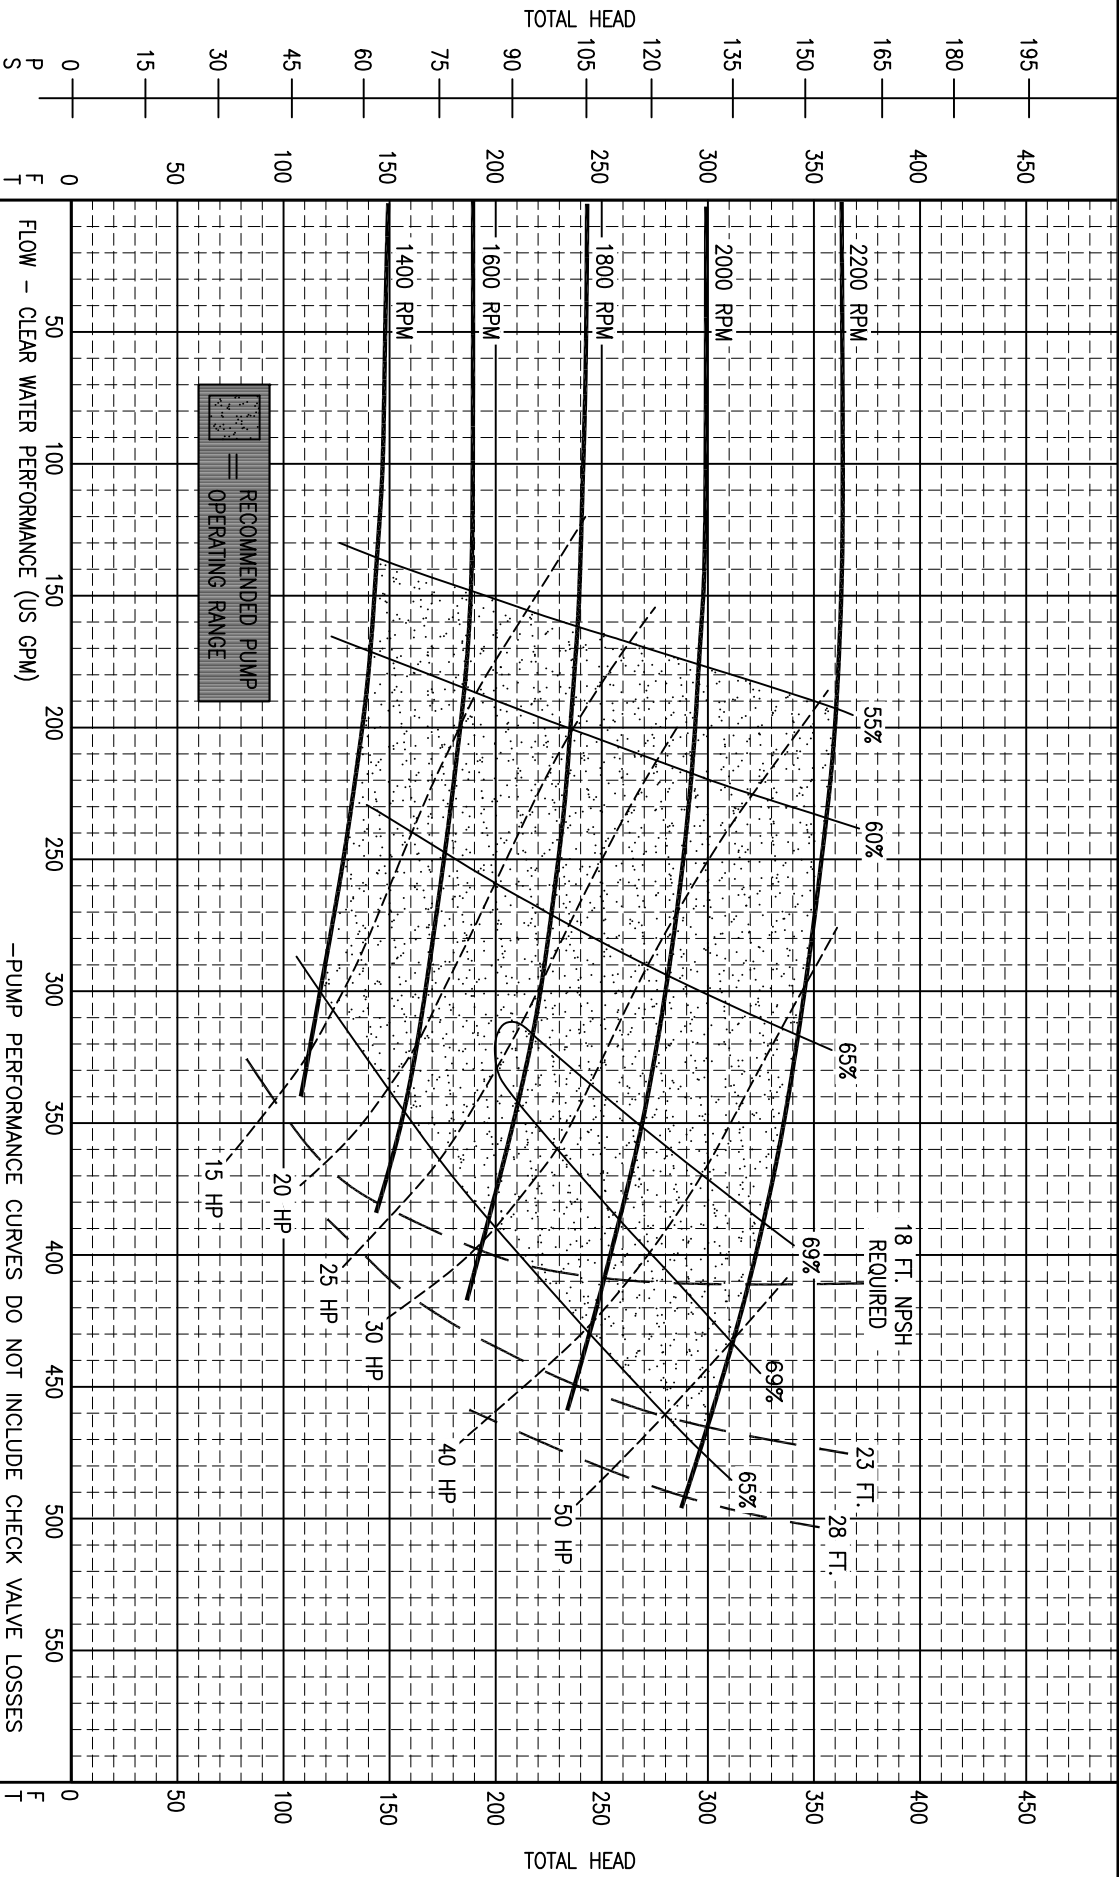

FLOW - CLEAR WATER PERFORMANCE (US GPM)

**CONFIDENTIAL**

-PUMP PERFORMANCE CURVES DO NOT INCLUDE CHECK VALVE LOSSES  
-POWER CURVES DO NOT INCLUDE PRIMING SYSTEM POWER CONSUMPTION