

# Instrumentation


## MAG Series

### Overview:

The MAG Series magnetic flow meters provide accurate and reliable flow monitoring. Recommended straight pipe sections are included with an EPDM lined flow measurement section.

### Features:

- +/- 0.5% accuracy
- No moving parts
- Mounted on a galvanized skid
- Dry digital contacts to trigger equipment or telemetry
- Dual output: Pulse and Analog 4-20 mA
- Plug and play connectors allow for fast and easy set-up
- NEMA 4X enclosure for outdoor use
- Inlet and outlet straight spool pieces provided for accuracy
- Programming can be set (with optional equipment) to control pumps and send alarms based on flow

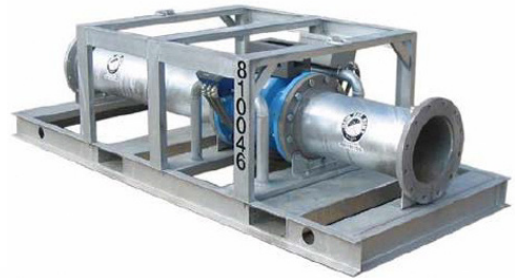

### Specs:

- Maximum Working Pressure = 200 PSI
- Temperature Range = 32°F to 200°F
- Power Consumption @ 120 VAC = 24 watts

### Accessories:

- Spillguard
- Suction and discharge hoses
- SolidGround® Traction Mat
- Battery powered data logger
- Alarm Agent

### Specs by Model:

	Connection	Flow (gpm)	Footprint	Weight
MAG 200	8"	255 - 5,100	96" x 36" x 28"	900 lbs.
MAG 300	12"	585 - 11,700	108" x 48" x 36"	1,500 lbs.
MAG 450	18"	1,200 - 24,000	150" x 48" x 36"	2,250 lbs.
MAG 600	24"	2,150 - 43,000	201" x 48" x 48"	3,850 lbs.



PUMPS • TANKS • FILTRATION • PIPE • SPILLGUARDS

Rain for Rent is a registered trademark of Western Oilfields Supply Company. Features and specifications are subject to change without notice.

**Liquid Ingenuity®**  
800-742-7246  
rainforrent.com