

Wellpoint Pump

RL200

Overview:


The 8" suction x 8" discharge positive displacement RL200 pump is most frequently used in wellpoint dewatering and provides a maximum 975 GPM flow and a maximum 277 feet of head. This self-priming rotary lobe pump features excellent solids-handling capabilities up to 2.7 inches.

Features:

- Suction lift to 28 feet
- Positive displacement pump
- Easy maintenance through quick release covers
- Rotors and tips can be replaced in ½ hour on job site
- Self-priming
- Pulsation free
- Suction lift to 28'
- Galvanized skid/trailer

Specs:

Maximum Flow	975 GPM
Maximum Head	277 feet
Maximum Solids Handling	2.7 inches
Pump Size	8" x 8"
Dry weight	3,400 lbs.
Fuel Consumption	2.7 GPH @ 1,800 RPM

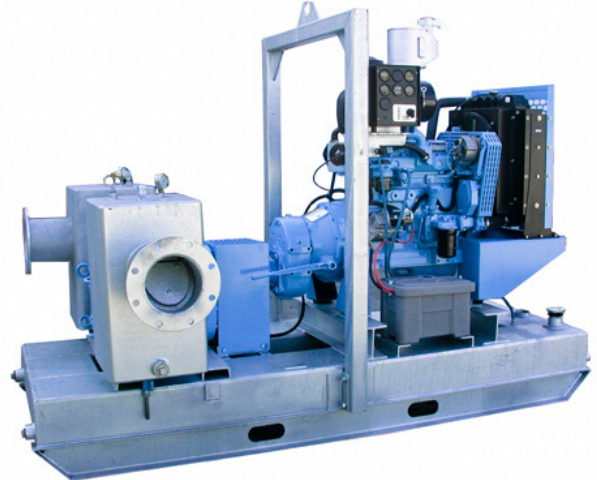

Accessories:

- Spillguard
- Suction and Discharge Hoses
- Fuel Nurse Tank
- VFD for electric driven models



PUMPS • TANKS • FILTRATION • PIPE • SPILLGUARDS

Rain for Rent is a registered trademark of Western Oilfields Supply Company. Features and specifications are subject to change without notice.

Liquid Ingenuity®
800-742-7246
rainforrent.com



Rain For Rent

CURVE: 01-0133-02-69

PUMP : RL-200

TYPE
ROTARY LOBE

IMPELLER &
WEAR RINGS
AR360/400

ALL INFORMATION CONTAINED IN OR DISCLOSED BY THIS DOCUMENT IS CONSIDERED CONFIDENTIAL AND PROPRIETARY BY RAIN FOR RENT. ALL DISCLOSURES OF DESIGN INFORMATION AND REPRODUCTION OF THIS DOCUMENT AND ALL SALES RIGHTS ARE EXCLUSIVELY RESERVED BY AND TO RAIN FOR RENT AND COMMUNICATION OF THIS INFORMATION TO OTHERS IS PROHIBITED WITHOUT THE PRIOR WRITTEN CONSENT OF RAIN FOR RENT

SUCTION
8"

DISCHARGE
8"

MAX. SPHERE
2.7"

FLOW - CLEAR WATER PERFORMANCE (US GPM)

1000
900
800
700
600
500
400
300
200
100
0

SPEED (RPM) 50 100 150 200 250 300 350

RECOMMENDED PUMP
OPERATING RANGE

0 PSI
30 PSI
60 PSI
90 PSI
120 PSI
100 HP
120 HP
130 HP
80 HP
90 HP
70 HP
60 HP
50 HP
40 HP
30 HP
20 HP
10 HP

CONFIDENTIAL