

Wellpoint Dewatering Pump

PT150

Overview:

The PT150 wellpoint pump has been designed for vertical and horizontal dewatering applications. These positive displacement pumps are fully self-priming and are capable of handling large quantities of air, water or any mixture of both without requiring a separate priming system. Furthermore, these pumps are capable of running dry indefinitely without causing damage or excessive wear to any part of the unit.

Features:

- Self-priming, no additional priming system required
- Excellent suction capabilities on all flows
- High pump efficiency
- Can run dry indefinitely
- 5 day run fuel tank
- Easy access for inspections and repairs
- Service interval 1500 hours
- Designed with integrated double containment
- Sound attenuated 48 dB(A) @ 33 ft


Specs:

Maximum Flow	396 GPM
Maximum Head	66 feet
Maximum Suction Lift	32 feet
Pump Size	6" x 6"
Dry weight	3,762 lbs.
Footprint (approx)	89" x 41"
Fuel tank	54 gallon
Fuel consumption	Max 0.4 gallon/hour
Sound Attenuation (Option)	48 dB(A) @ 33 ft



Accessories:

- Wellpoint Equipment (headers, swing joints and points)
- Suction and Discharge Hoses
- Weir Box/Tank
- Water Meter
- PipeStax®
- RampLox®
- SolidGround® Traction Mats

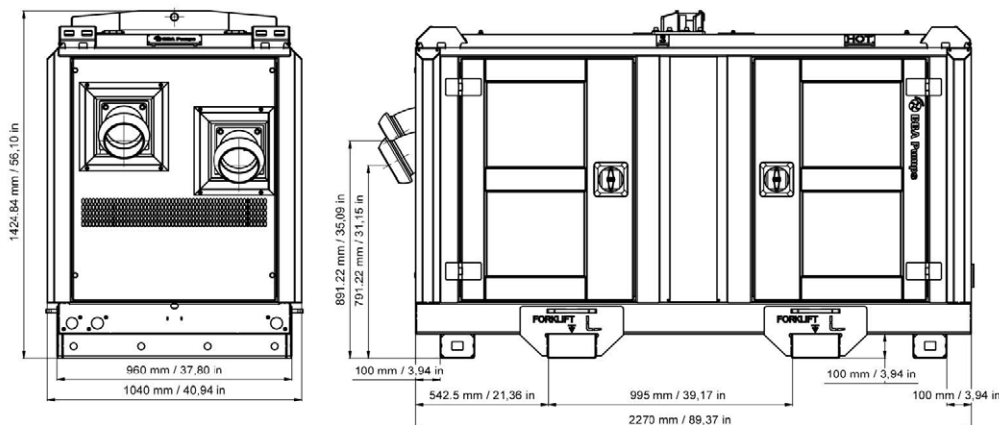

PUMPS • TANKS • FILTRATION • PIPE • SPILLGUARDS

Rain for Rent is a registered trademark of Western Oilfields Supply Company. Features and specifications are subject to change without notice.



Liquid Ingenuity
800-742-7246
rainforrent.com