

High Head Pump

HH325c

Overview:

The 12" suction x 10" discharge self-priming centrifugal HH325c high head pump provides up to a maximum of 6,800 gallons per minute pumping and up to 415 feet of head. The HH325c is usually mounted on a skid and features the standard PowerPrime Clean Prime Venturi priming system which allows it to run continuously, unattended and even run dry.

Features:

- Suction lift to 28 feet
- Continuous self-priming
- Runs dry unattended
- Auto-start capable control panel
- Electric drive option
- Cat engines standard
- IT4 engines available





Specs:

Maximum Flow	6,600 GPM
Maximum Head	450 feet
Pump Size	12" x 10"
Maximum Solids Handling	4 inches
Dry weight	
Footprint	197" x 92"

Accessories:

- Spillguard
- Suction and Discharge Hoses
- Fuel Nurse Tank
- VFD for electric driven models

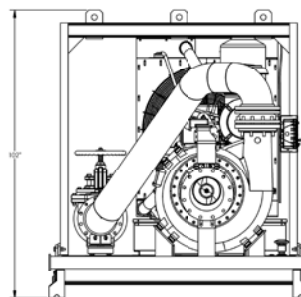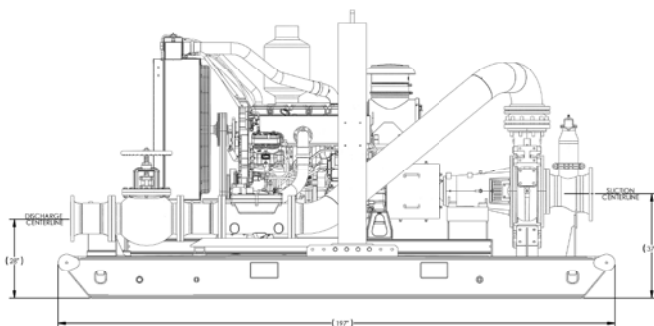

PUMPS • TANKS • FILTRATION • PIPE • SPILLGUARDS

Rain for Rent is a registered trademark of Western Oilfields Supply Company. Features and specifications are subject to change without notice.

800-742-7246
rainforrent.com



Rain For Rent

CURVE: 01-0133-02-12

PUMP : HH-325C

SUCTION 12"

DISCHARGE 10"


MAX. SPHERE 4"

IMPELLER 19.75"

IMPELLER 2 VANE

IMPELLER & WEAR RINGS DUCTILE IRON

ALL INFORMATION CONTAINED IN OR DISCLOSED BY THIS DOCUMENT IS CONSIDERED CONFIDENTIAL AND PROPRIETARY BY RAIN FOR RENT. ALL DISCLOSURES OF DESIGN INFORMATION AND REPRODUCTION OF THIS DOCUMENT AND ALL SALES RIGHTS ARE EXCLUSIVELY RESERVED BY AND TO RAIN FOR RENT AND COMMUNICATION OF THIS INFORMATION TO OTHERS IS PROHIBITED WITHOUT THE PRIOR WRITTEN CONSENT OF RAIN FOR RENT

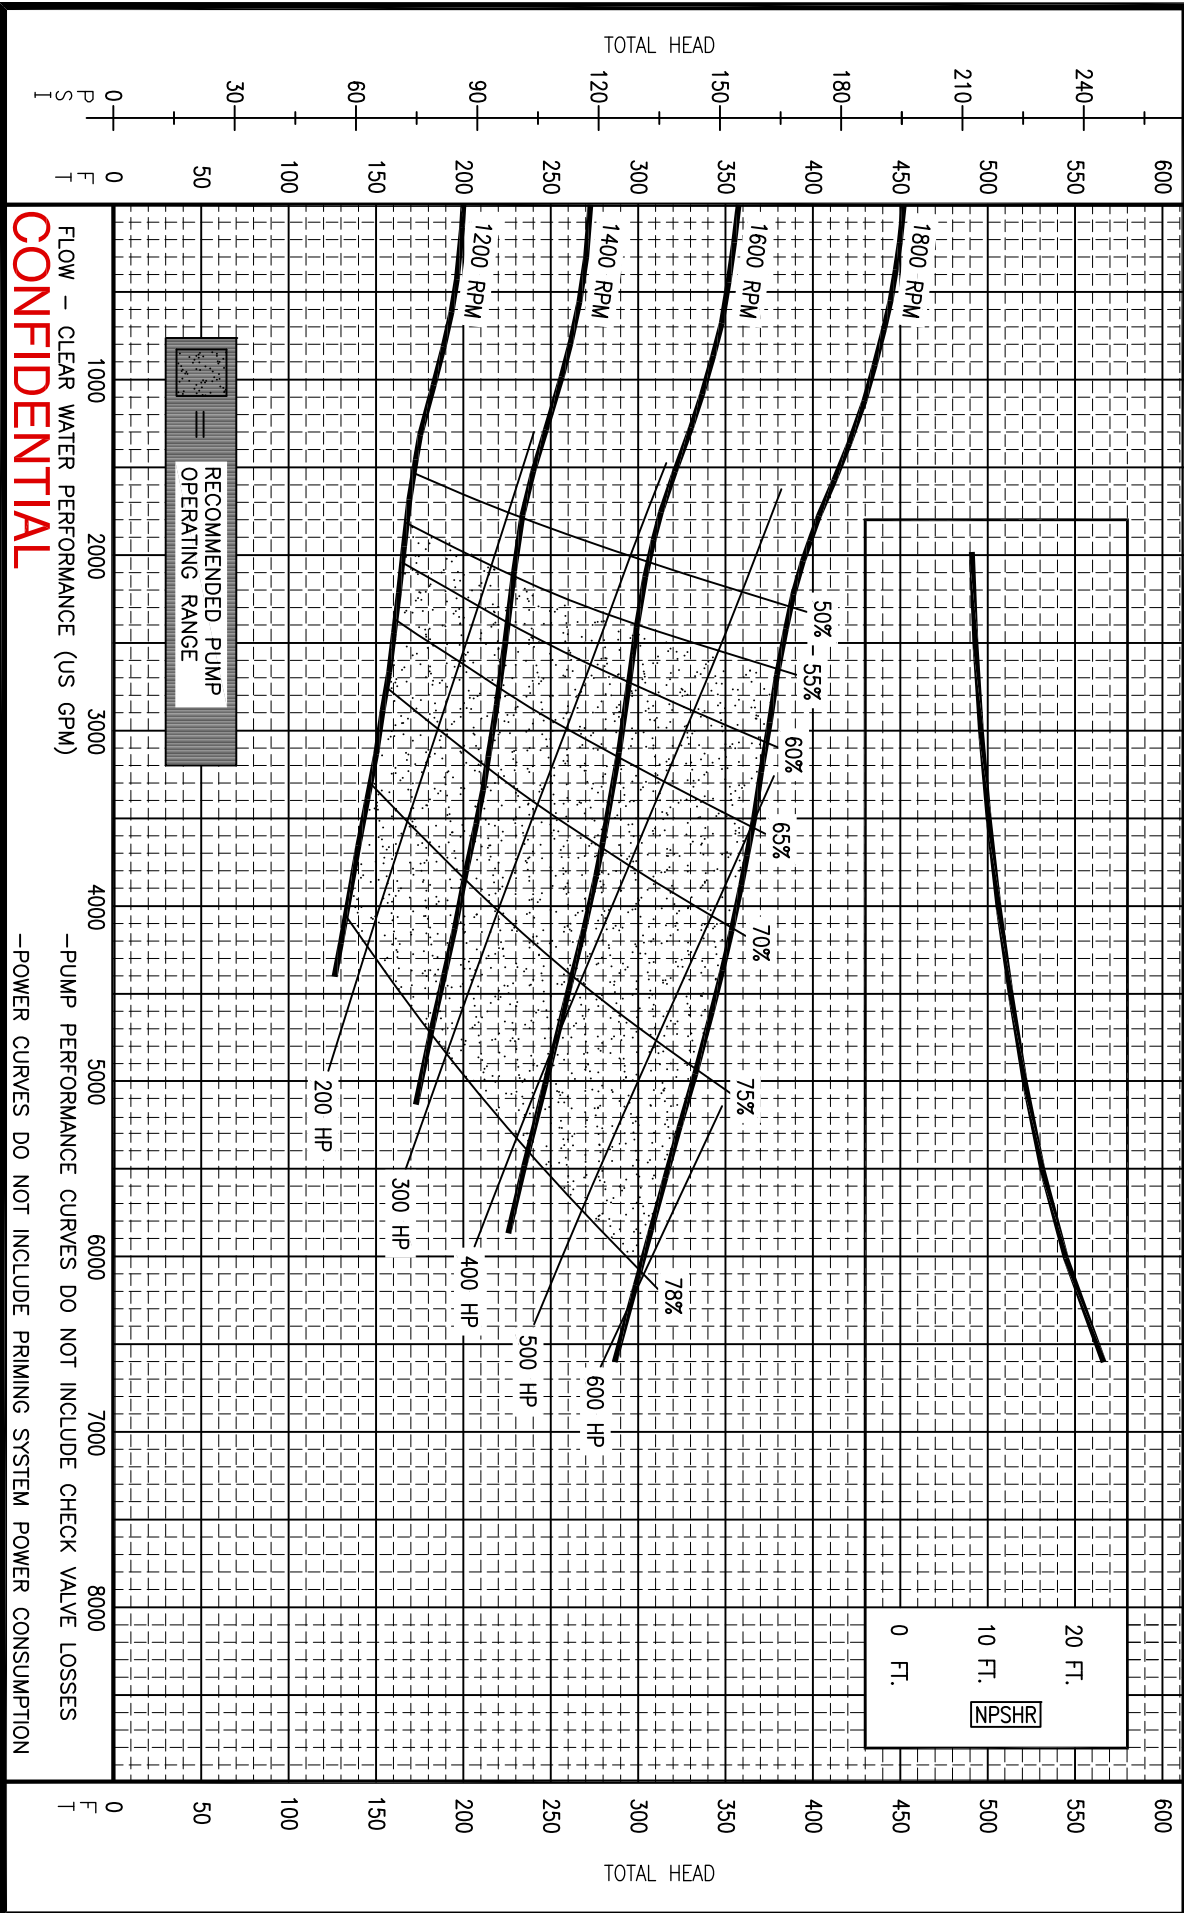

CONFIDENTIAL