

# Rain for Rent

## NSF61 Coated Water Tank

### Overview:

Store liquids with confidence with Rain for Rent's NSF61 Coated water tank. Permanently attached axle, for maximum maneuverability, allows this tank to be moved with ease on the job site. The staircase ensures proper protection for workers on site. The tank also offers a solvent free, flake-filled, high performance epoxy coating designed as an internal tank lining for chemical or another commodity storage. It is suitable for use in potable water tanks/piping conforming to ANSI/NSF Standard 61 for drinking water components. It also meets AWWA C210 specification.



(smooth walled, flat top tank pictured)

### Features:

- ANSI/NSF Standard 61 Compliant
- High-impact resistance coating with superior adhesion to steel
- Vapor Tight Tanks: rated to 16oz/in<sup>2</sup> of pressure and 0.4oz/in<sup>2</sup> vacuum
- V-drain floor with front and rear 4" flanges with valves
- OSHA Compliant Stairway
- Meets AWWA C210 specification
- Spears Butterfly Valves with EPDM seals and seats that are NSF certified for potable water use
- Multiple tank styles available

### Accessories:



- E-CONTAIN® Spillguards
- SolidGround® Traction Mats
- Radar Level Gauge
- Mechanical Level Gauge
- PipeStax®
- HoseTrax®
- Suction and Discharge Hose

### Specs:

Total storage volume: 21,000 gallons

ANSI/NSF Standard 61 Certified

Refer to [www.ul.com](http://www.ul.com), UL File No. MH26118 for specific application and use requirements.

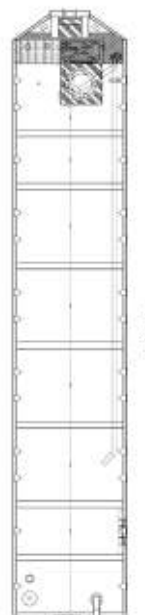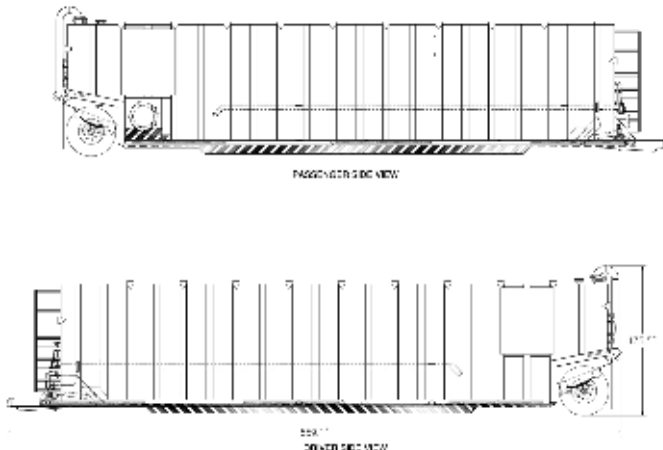

**PUMPS • TANKS • FILTRATION • PIPE • SPILLGUARDS**

THE SPECIFICATIONS CONTAINED IN THIS SHEET ARE OPERATING GUIDELINES AND ARE INTENDED TO BE GENERAL REPRESENTATIONS OF EQUIPMENT CAPABILITIES. ACTUAL PERFORMANCE WILL VARY BASED UPON SYSTEM APPLICATION, AGE OF EQUIPMENT, MANUFACTURER, AND OPERATION.

**Liquid Ingenuity®**  
800-742-7246  
[rainforrent.com](http://rainforrent.com)